



铝壳电阻器
Power Metal Resistor

采用美观大方的铝合金外壳，易附加散热器，可紧密安装组合使用，防护等级更高。适用于对震动、防护、气候等要求较高的恶劣工况中，更广泛应用于变频器、伺服、设备放电、电源等电气回路中。

With nice aluminum alloy shell, easy to attach radiator, can be installed in close combination of the use, higher protection class. Applies to vibration, protect-ion, climate, etc harsh working conditions require a higher and, more widely used in inverter. servo. eq-uipment discharge. power supply and other electr-ical circuits.




产品说明 (Product Description) :


功率范围: 50W-3000W
电压范围: 0.5KV-2KV
阻值范围: 1R-10KR
耐压: AC2.5KV-20KV/50Hz 1min
IP等级: IP20-IP54
振动: 1.5g
额定温升: 375℃
温漂: 40-400ppm/℃
载流体材料: 0Cr25AL5/Ni80Cr20
产品执行标准: GB-5729

Range of rated power: 50W-3000W
Range of voltage: 0.5KV-2KV
Range of rated power: 1R-10KR
Voltage resistance: AC2.5KV-20KV/50Hz 1min
IP class: IP20-IP54
Vibration: 1.5g
Rated temperature rise: 375℃
Temperature drift: 40-400ppm/℃
Carrier material: 0Cr25AL5/Ni80Cr20
Standard the Product Conforms: GB-5729

产品识别码 (Product Identification Code) :

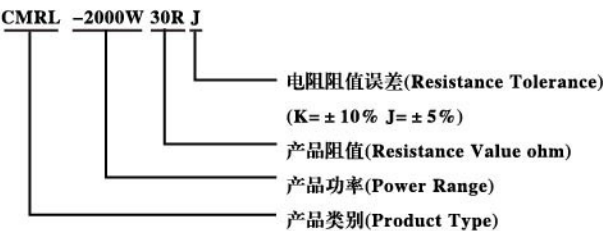

产品尺寸图 (Product Size) :

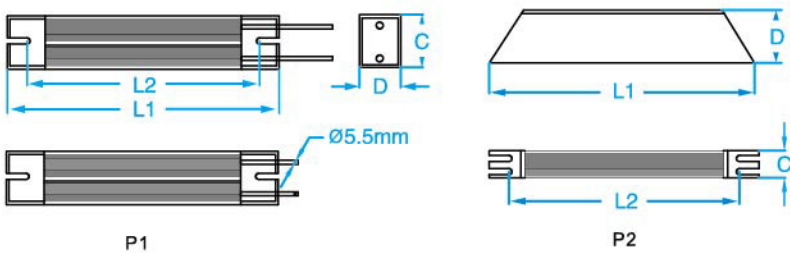

产品型号 Product Type	功率 Adapted Power(W)	图号 picture	尺寸 Size(mm)				出线方式 Connection	
			L1	L2	C	D	端子 Terminal	引线 Lead
CMRL	50	P1	115	98	40	20	▶	500mm 1.5 mm2
	80		140	123	40	20	▶	500mm 1.5 mm2
	100		165	148	40	20	▶	500mm 1.5 mm2
	120		190	173	40	20	▶	500mm 1.5 mm2
	150		215	197	40	20	▶	500mm 1.5 mm2
	200		165	147	60	30	▶	500mm 1.5 mm2
	300		215	197	60	30	▶	500mm 1.5 mm2
	400		265	247	60	30	▶	500mm 1.5 mm2
	500	P2	335	317	60	30	▶	500mm 1.5 mm2
	800		400	382	61	59	M6	◀
	1000		400	384	50	107	M6	◀
	1200		450	434	50	107	M6	◀
	1500		485	470	50	107	M6	◀
	2000		550	532	50	107	M6	◀
	3000		600	585	50	107	M6	◀